


U:\Projects\_VAN\1190\0186\01\Design\CAD\20\_PROD\SET 1\ACAD-DET - 1190018601 Utility Details.dwg, SS16, 2020/07/10 10:08 am rthomson

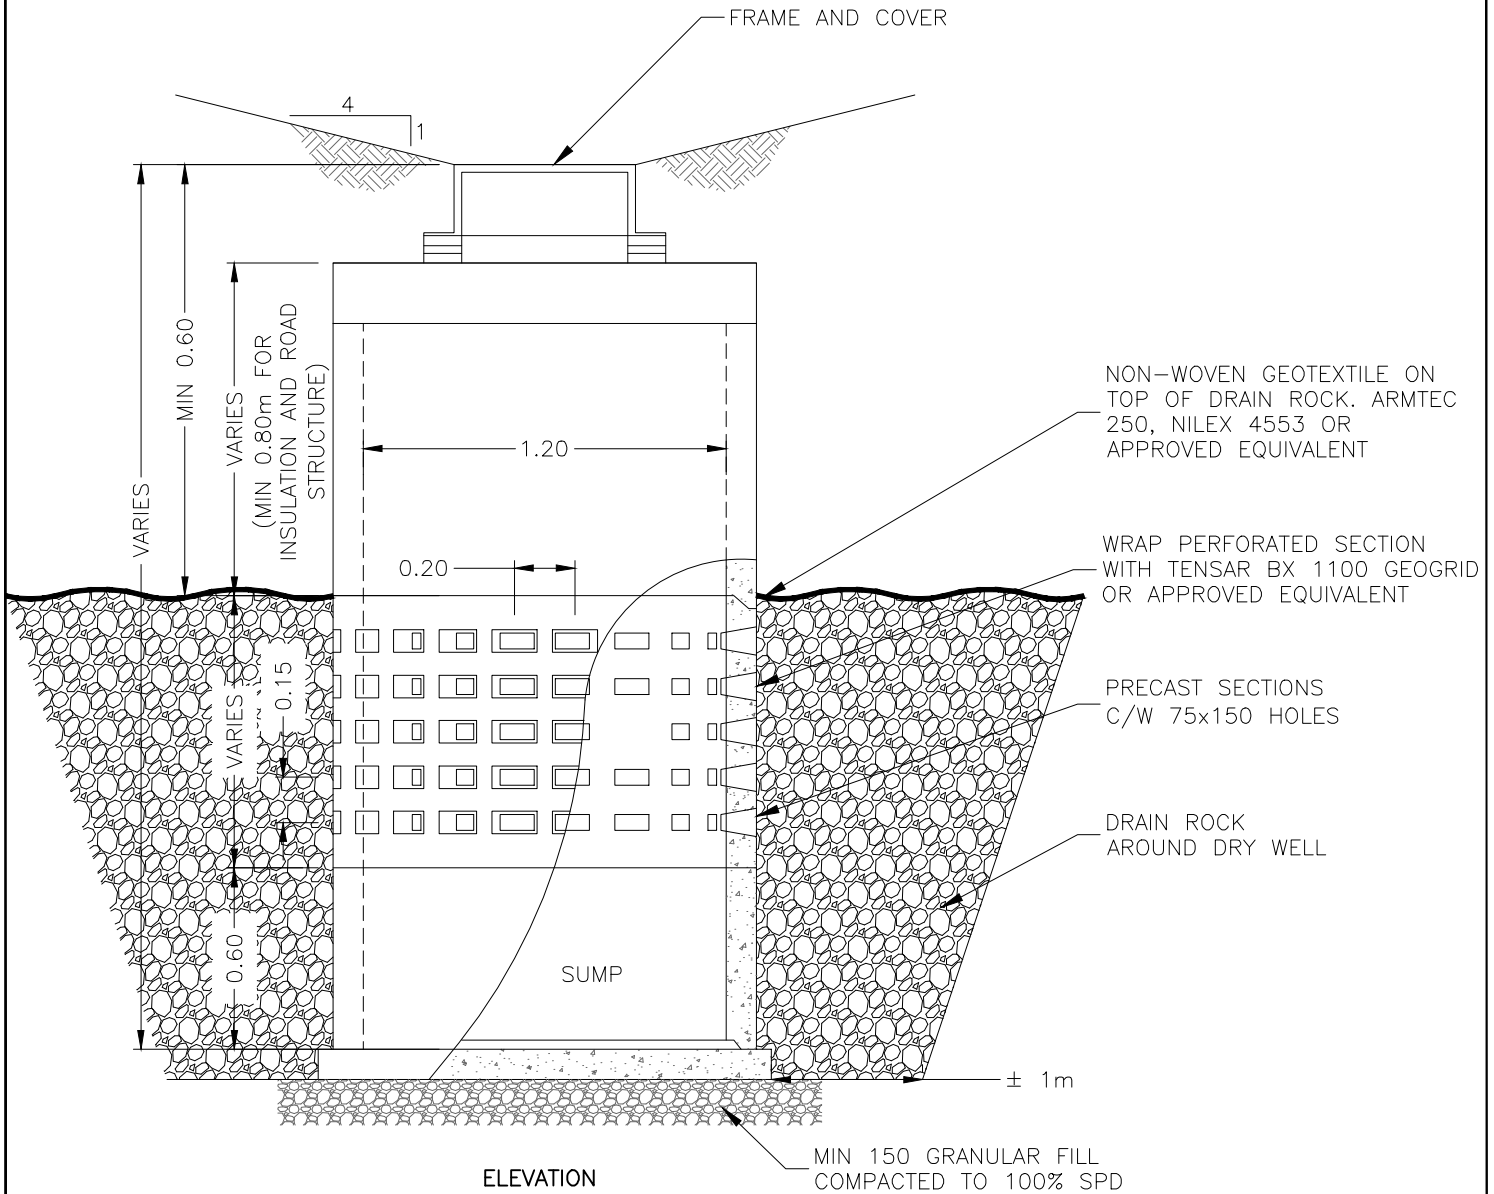

ELEVATION

NOTES:

1. PERFORATED SECTION OF DRY WELL TO BE WRAPPED IN TENSAR BX 1100 GEOGRID.
2. COVER CLAYS/SILTS EXPOSED IN SIDES OF EXCAVATION AT DEPTH OF MANHOLE PERFORATIONS WITH NON-WOVEN GEOTEXTILE. GEOTEXTILE WITH PUNCTURE STRENGTH OF 1.20 kN, APPARENT OPENING SIZE 0.15-0.25mm.
3. EXCAVATE TO A FREE DRAINING GRANULAR LEVEL.
4. VOLUME OF DRAIN ROCK AROUND DRY WELL WILL BE DEPENDANT ON EXPECTED INFLOW VOLUMES AND RATES AS WELL AS EXPECTED, LONG-TERM NATIVE SOIL PERCOLATION RATES AS DETERMINED BY THE PROFESSIONAL ENGINEER

	SCALE:	TITLE:		
	DATE DRAWN:	DRY WELL		
	APPROVED BY:	SECTION:	REVISION No.	DWG.No.
	NOT TO SCALE			SS16
	2020-07-10			